



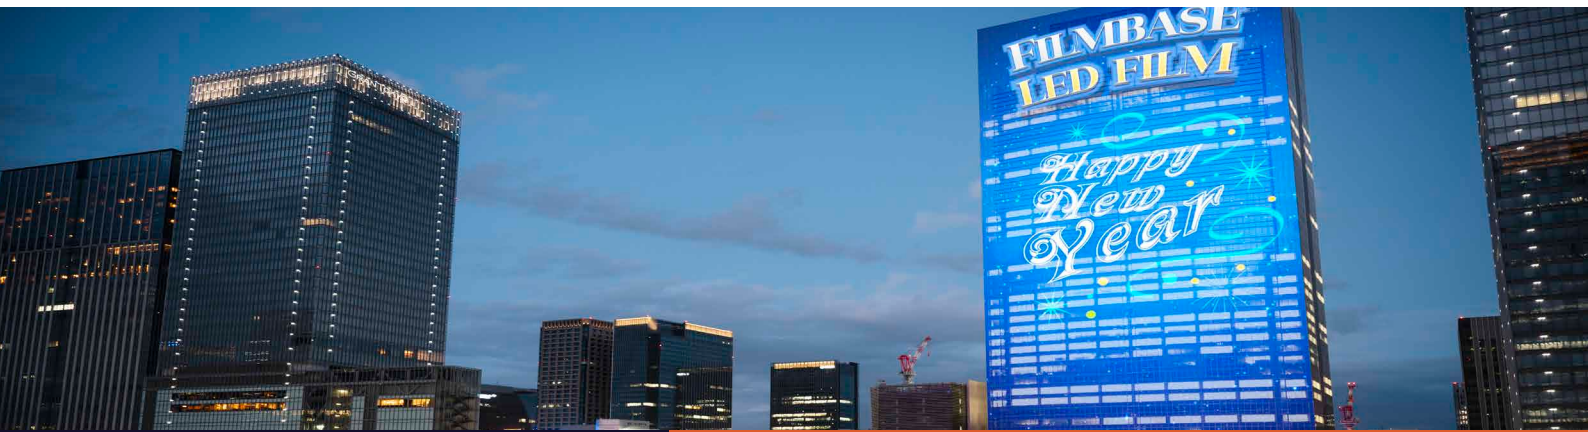

Hanging LED Film

95-99%
Visual Transparency

75%
Energy Saving

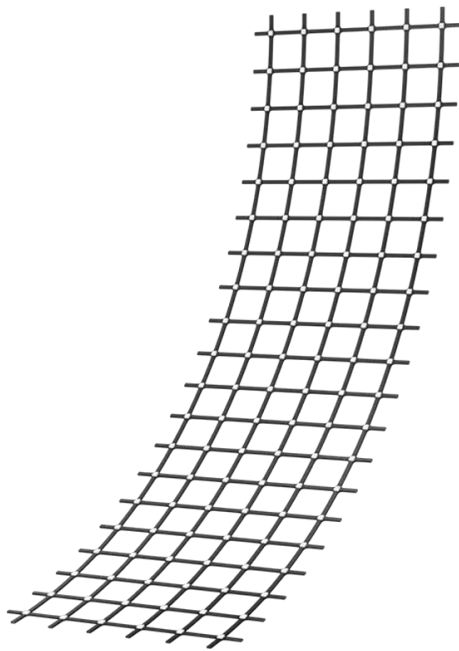

Adjustable high
brightness



High definition
transparent



Ultra thin 2mm



Multiple displays



Easy for installation,
Male+Female connect,
plug and Play



Multiple controls



FILMBASE NZ by COLOURWORX


Email: sales@colourworx.co.nz Tel: +64 9 263 0500

Address: Unit D / 138 Plunket Ave, Manukau, Auckland 2104, NZ


www.colourworx.co.nz

Name	Project	Parameters
LED screen	Screen size	W4.8*H15m
	Resolving Power	P40
	Spacing	40*40mm
	Pixel	300,000 dots
	Input Voltage	DC24V
	Input Type	Lithium battery
	Lamp Bead Packaging	5050
	Drive Mode	Static state
	Refresh Frequency	3840/1920Hz
	Chip Structure	RGB+IC
	System Support	Novastar
	Operation Method	Phone, iPad
	Media Format	Video; images
	Video Format	AVI; MP4; WMV; MOV
	Image Format	JPG; PNG; GIF; BMP
Power battery	Battery name	Ternary lithium battery
	Battery capacity	10.4Ah
	Use group	5 groups
	Cell model	18650
	Charging voltage	25.2V
	Nominal voltage	22.22V

Use expanded state

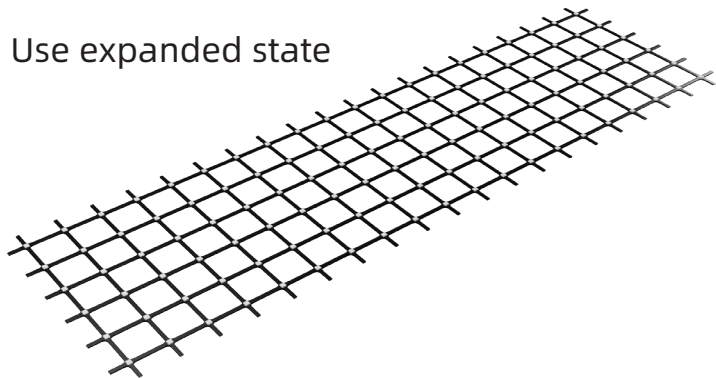

Roll up status

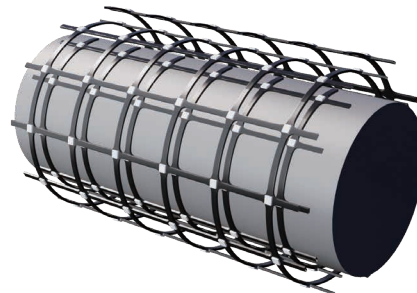

*Color, thickness, size do not represent the actual situation, only for the convenience of the illustration.

FILMBASE NZ by COLOURWORX

Email: sales@colourworx.co.nz **Tel:** +64 9 263 0500

Address: Unit D / 138 Plunket Ave, Manukau, Auckland 2104, NZ

www.colourworx.co.nz